


FD- PM3A

Screen snap & Kit Parts List: Dual Channel LCD 500MHZ RF Power Meter With Data Logger


PM3A Kit:




500MHZ Sensor Board: (AD8307 DIP8)

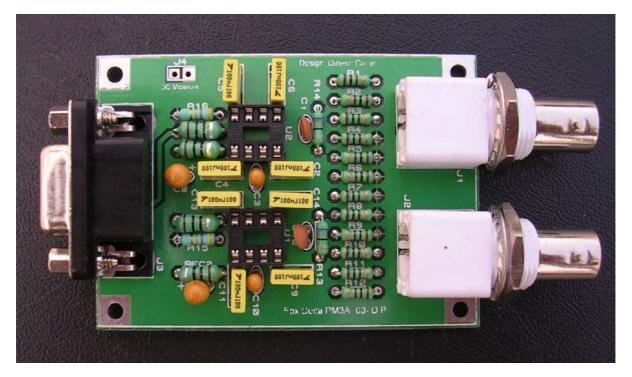

PM3A Silk:

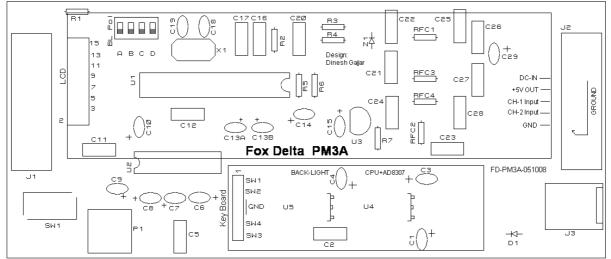

Silk Key Board:

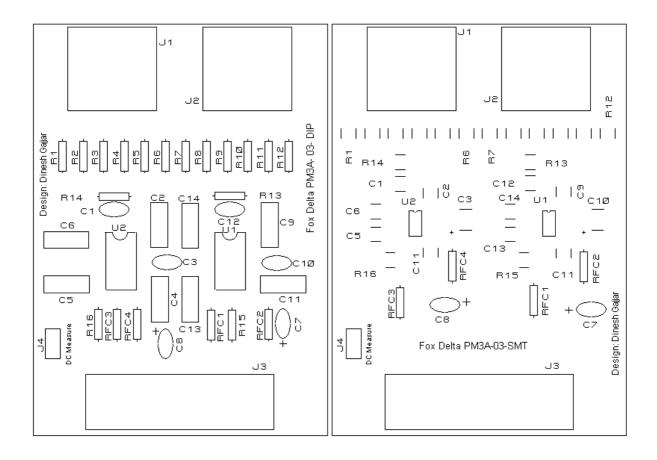

PM3A Parts List:

QuantityCheckPart Detail1PIC16F876A DIP (Pre-Programmed)1MAX232 DIP16612mm Push Buttons with PTH PM3A-1 & 2 KB PCBs1Alps Encoder12Way Push Switch with Knob (SW1) Back-Light Control2LCD Supports1Double Sided PTH PCB "PM3A"	
1 MAX232 DIP16 6 12mm Push Buttons with PTH PM3A-1 & 2 KB PCBs 1 Alps Encoder 1 2Way Push Switch with Knob (SW1) Back-Light Control 2 LCD Supports 1 Double Sided PTH PCB "PM3A"	
612mm Push Buttons with PTH PM3A-1 & 2 KB PCBs1Alps Encoder12Way Push Switch with Knob (SW1) Back-Light Control2LCD Supports1Double Sided PTH PCB "PM3A"	
1 Alps Encoder 1 2Way Push Switch with Knob (SW1) Back-Light Control 2 LCD Supports 1 Double Sided PTH PCB "PM3A"	
1 2Way Push Switch with Knob (SW1) Back-Light Control 2 LCD Supports 1 Double Sided PTH PCB "PM3A"	
2 LCD Supports 1 Double Sided PTH PCB "PM3A"	
1 Double Sided PTH PCB "PM3A"	
2 78M05 Regulator	
1 LM385-2,5V TO92	
1 IC Socket 28Pin (PIC16f876A) (May be 14+14)	
2 IC Sockets 8Pin (2xAD8307)	
1 IC Socket 16Pin (MAX232)	
1 LCD 2x20 (Includes male/female DIL headers) with Back-Lig	ht
2 6 Pin Female Header with 6Pin Male (KB)	
1 4 Position DIP Switch (LCD B/L Polarity)	
1 4.000 MHZ Crystal	
1 16Pin FRC Male Socket Straight (LCD on Main Board)	
1 16pin FRC R/A Socket for LCD (Remote Mount)	
1 16pin FRC Ribbon cable with Both Side Female (LCD) 30cm	
1 16Pin Female for LCD (Direct Mount)	
1 D9 Female R/A Connector (PC Connection)	
1 DC Connector	
1 D9 Male R/A Connector (Connection to sensor board)	
1 Standard D9 Male to Female Cable (1 Meter long)	
Parts Capacitors, Resistors & Inductors	
2 10uf Tantalum (C13B/13A) (Only if 4xPush Button Keyboard	is used)
11 1uf Tantalum (C1, 3, 4, 6, 7, 8, 9, 10, 14, 15, 29)	
9 0.1uf Ploy (C2, 5, 11, 12, 17, 18, 23, 22, 25, 26)	
5 0.001uf (1000pf) (C20, 21, 24, 27, 28)	
2 22/27pf (C19, 18)	
1 1N4007 (D1)	
1 10K Bourns Preset (LCD BL) P1	
1 22 ohm 1/4w (R1)	
1 47K (R5)	
1 3.3K (R6: used when LM385 is installed)	
1 120k (R3)	
1 180k (P4)	
1 180k (R4) 1 10k (R2)	
1 10k (R2)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 1 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12) 2 470k (R15, 16)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12) 2 470k (R15, 16) 2 BNC R/A Connector	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12) 2 470k (R15, 16) 2 BNC R/A Connector 1 D9F R/A Connector	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12) 2 470k (R15, 16) 2 BNC R/A Connector 1 D9F R/A Connector 4 10uh RFC (RFC1, 2, 3, 4)	
1 10k (R2) 2 1k (R6, R7) (R7 is only installed when LM385 is not used) 4 RFC 10uh (RFC1, 2, 3, 4) Sensor 2 2 10uf Tan (C7, C8) 1 Sensor PTH PCB for AD8307 DIP8 2 10pf Ceramic (C1, 12) 2 68 ohms (R13, 14) 12 100 ohms (R1 to R12) 2 470k (R15, 16) 2 BNC R/A Connector 1 D9F R/A Connector	

Notes: AD8307 not included with Kit or Assembled

Dinesh Gajjar / 14th Nov. 2008 For more details, please visit Project Page: <u>http://www.foxdelta.com</u>